

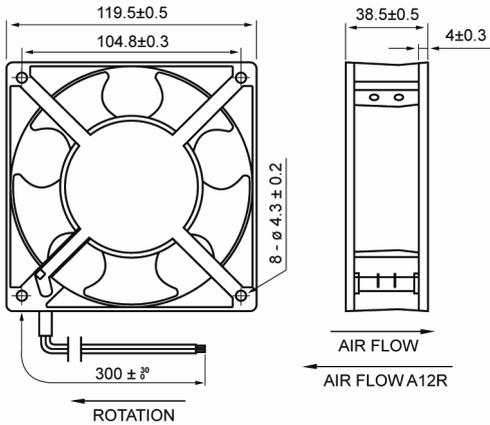
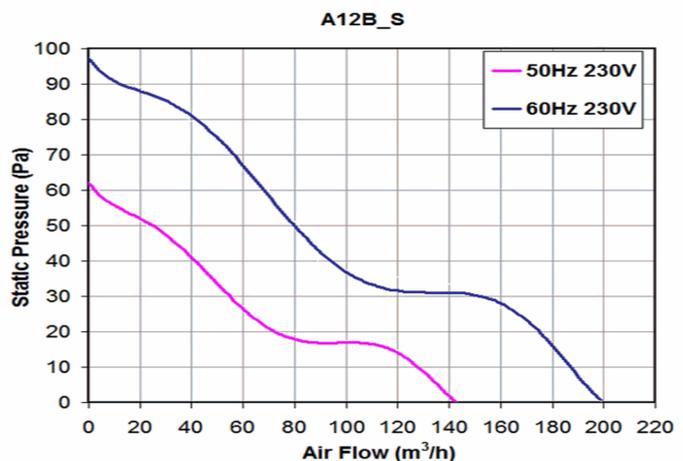
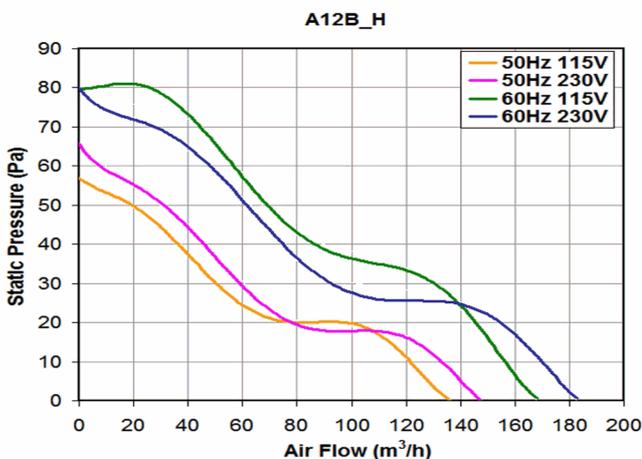


"A12BW" SERIES COSTECH FANS

Description: **Axial fan a.c. 120X120x38mm**

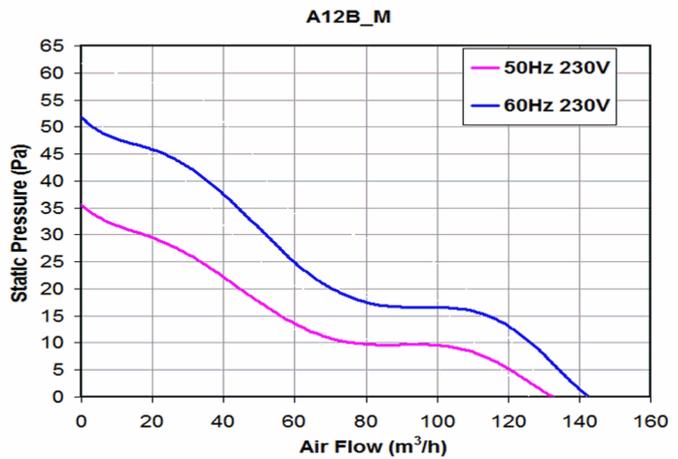

Casing material: Die-casting aluminium painted black
Impeller material: Black thermoplastic UL 94V-0
Protection degree: IP20, according to EN 60529 standard
Fixing system: by No 4 M4 screws
Motor protection: Impedance
Storage temperature: from -40°C to +70°C
Rated temperature range: from -10°C to +60°C
Lifetime L10 at 40°C: 30.000 h
Electrical connection: 2 leads 24 AWG UL, 300 mm long
Approvals: UL E223195; VDE 40009963
Weight: 0.550 kg

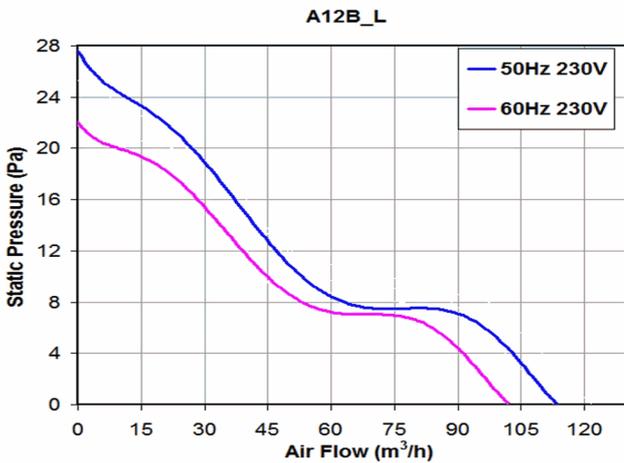

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A12B12HVBW00	Ball	115 V a.c.	50/60	0.210/0.180	20/18	136/168	57/80	46.0/49.0	2,750/3,050	CE; cURus; VDE
A12B23HVBW00	Ball	230 V a.c.	50/60	0.130/0.110	20/19	148/182	65/80	46.0/49.0	2,750/3,050	CE; cURus; VDE
A12B23HWSW00	Sleeve	230 V a.c.	50/60	0.130/0.110	20/19	148/182	65/80	46.0/49.0	2,750/3,050	CE; cURus; VDE
A12B23LVBW00	Ball	230 V a.c.	50/60	0.050/0.060	11/10	114/102	27/22	43.0/42.0	2,200/1,800	CE; cURus; VDE
A12B23LWSW00	Sleeve	230 V a.c.	50/60	0.050/0.060	11/10	114/102	27/22	43.0/42.0	2,200/1,800	CE; cURus; VDE
A12B23MVBW00	Ball	230 V a.c.	50/60	0.090/0.080	16/15	133/143	35/52	43.0/45.0	2,400/2,600	CE; cURus; VDE
A12B23SVBW00	Ball	230 V a.c.	50/60	0.140/0.120	24/22	143/199	62/97	48.0/50.0	2,700/3,100	CE; cURus; VDE

data with uncertainty of 15%