> CONTATTACI



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Max Airflow	600/670	m³/h
	353/394	CFM
Airflow with Exhaust Filter	452/505	m³/h
	266/297	CFM
Max Static Pressure	255/250	Pa
	1.02/1.00	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.41/0.45	А
Rated Power	83/103	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
Bearing	Ball Bearing	



FF20A230UER

standard with fan

> CONTATTACI


Technical data			
GENERIC DATA			
Spare Parts Filter Media	M20FPF-EU3		
Casing Material	PC/ABS UL94 V-0		
RAL Number	7035		
Life Expectancy	63000	h at 25 °C	
	63000	h at 77 °F	
Airflow Direction	Reverse		
Electrical Connection	Screwless Terminal Block		
Wires Section	0.75-2.5	mm²	
Wires Section	20-14	AWG	
Fan Noise	60/62	dB(A)	
Filter Class	G3	EN 779	
Filter Class	ISO coarse 55%	ISO 16890	
Filter Material	thermo-linked progressive structure synthetic fibre		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		
Operating Temperature	-25÷60	°C	
Operating Temperature	-13÷140	°F	
Storage Tomperature	-30÷70	°C	
Storage Temperature	-22÷158	°F	




FF20A230UER

standard with fan

> CONTATTACI

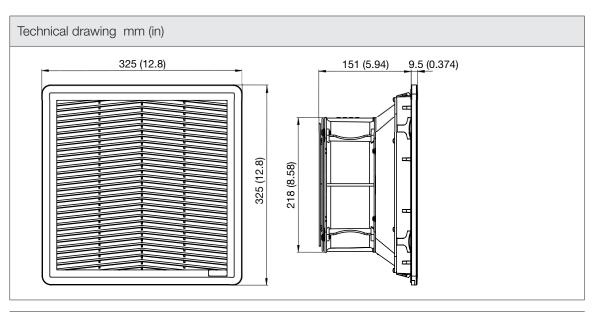

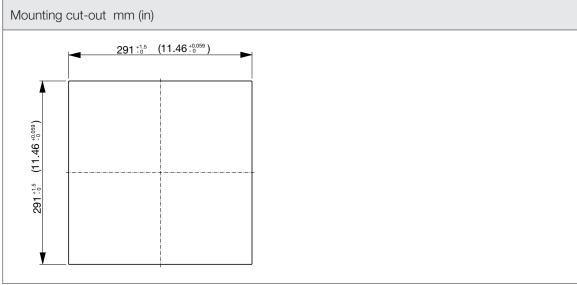



FF20A230UER

standard with fan

> CONTATTACI

