C17B12HTBF00

AC axial fans

> CONTACT US



Axial fans provide forced-air cooling solution to temperature-sensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data		
APPROVALS		
Approvals	CE; cURus; UKCA	
PERFORMANCE		
Max Airflow	300/360	m³/h
	177/212	CFM
Max Static Pressure	167/187	Pa
	0.67/0.75	in H2O
RPM	2850/3400	RPM
ELECTRICAL DATA		
Rated Voltage	115	V a.c.
Rated Current	0.25/0.23	А
Rated Power	29/28	W
Operating Voltage	103-126	V a.c.
Frequency	50/60	Hz
Appliance Class	1	
Insulation Class	В	
Motor Protection	Thermally Protected	
MECHANICAL DATA		
Bearing	Ball Bearing	
GENERIC DATA		
Casing Material	Die-Casting Aluminium	
Airflow Direction	Air exhaust over brackets	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



C17B12HTBF00

AC axial fans

> CONTACT US

Technical data			
Electrical Connection	Fast-On 3x0,5mm		
Life Expectancy	40000	h at 40 °C	
	40000	h at 104 °F	
Fan Noise	54/58	dB(A)	
Fixing System	Screws		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP44		
Operating Temperature	-40÷70	°C	
	-40÷158	°F	
Storage Temperature	-40÷80	°C	
	-40÷176	°F	
UL DATA			
UL File Number Recognized Component	E223195		


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



C17B12HTBF00

AC axial fans

> CONTACT US

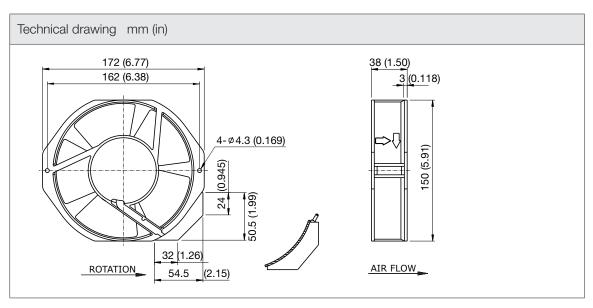

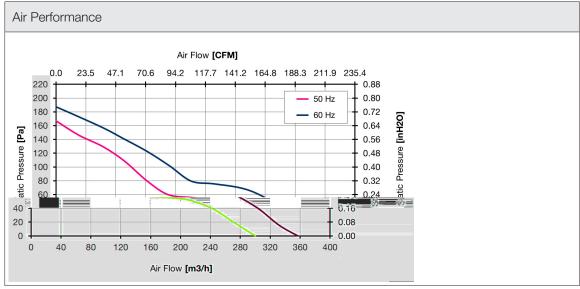


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

