CCU09A231RNIUX

indoor

> CONTACT US



The CCU series roof-mounted cooling units represent an ideal solution for cooling battery electrical panels or when accessibility and lateral space are limited, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Cooling Capacity L35L35	975/1075	W	
	3327/3668	BTU/hr	
Cooling Capacity L35L50	795/815	W	
	2713/2781	BTU/hr	
ELECTRICAL DATA			
Rated Voltage	230	V a.c.	
Rated Current	4.2/4.6	А	
Rated Power L35L35	445/525	W	
Rated Power L35L50	495/595	W	
Frequency	50/60	Hz	
Max Current	20	А	
Fuse T	8	А	
GENERIC DATA			
Casing Material	Painted Steel		
RAL Number	7035		
Electrical Connection	Connector		
ENVIRONMENTAL AND THERMAL DATA			
IP Protection Degree	IP54		



## COOLING UNITS Roof Mounting



CCU09A231RNIUX

indoor

> CONTACT US


Technical data			
. oo maa aaa			
Operating Temperature	20÷50	°C	
	68÷122	°F	
Refrigerant Number	R134a		
Refrigerant Charge	210	g	
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa	




CCU09A231RNIUX

indoor

> CONTACT US

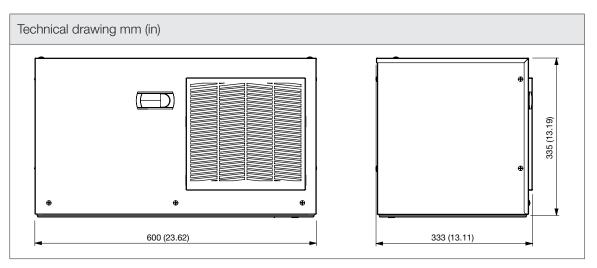

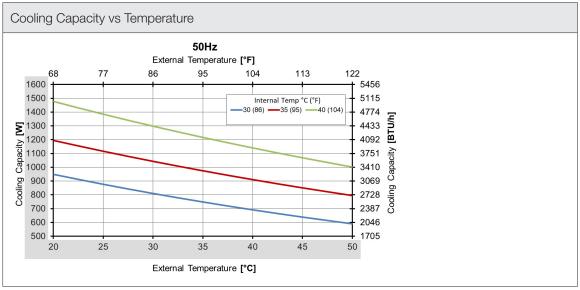



CCU09A231RNIUX

indoor

> CONTACT US

