

CCU30A403WSIUX

indoor

> CONTATTACI



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data

APPROVALS

Approvals	CE; UKCA	
-----------	----------	--

PERFORMANCE

Cooling Capacity L35L35	2795/3075 9537/10492	W BTU/h
Cooling Capacity L35L50	2235/2345 7626/8001	W BTU/h

ELECTRICAL DATA

Rated Voltage	380/400	V a.c. 3 ~ at 50 Hz
Rated Voltage	440/460/480	V a.c. 3 ~ at 60 Hz
Rated Current	2.8	A at 380 V a.c. 3 ~ 50 Hz
Rated Current	2.6	A at 400 V a.c. 3 ~ 50 Hz
Rated Current	2.7	A at 440 V a.c. 3 ~ 60 Hz
Rated Current	2.6	A at 460 V a.c. 3 ~ 60 Hz
Rated Current	2.5	A at 480 V a.c. 3 ~ 60 Hz
Rated Power L35L35	1095/1265	W
Rated Power L35L50	1255/1515	W
Frequency	50/60	Hz
Max Current	12	A
Fuse T	8	A
GENERIC DATA		
Casing Material	Painted Steel	

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU30A403WSIUX

indoor

> CONTATTACI

Technical data		
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R513A	
Refrigerant Charge	850	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP54	
Operating Temperature	20÷50 68÷122	°C °F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU30A403WSIUX

indoor

> CONTATTACI

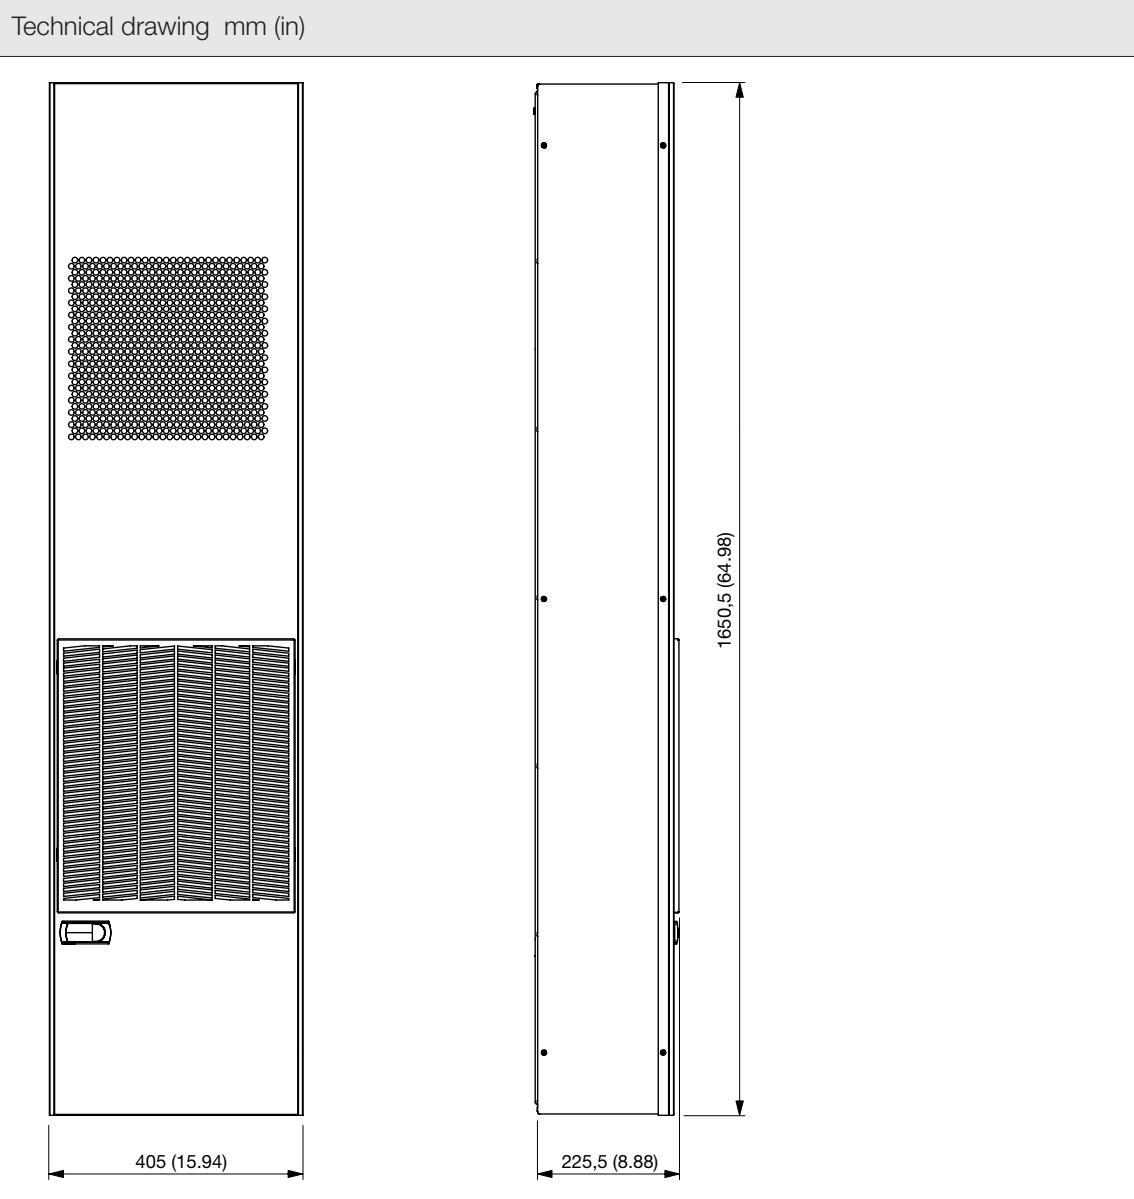


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.


CCU30A403WSIUX

indoor

> CONTATTACI

Cooling Capacity vs Temperature

W 50Hz

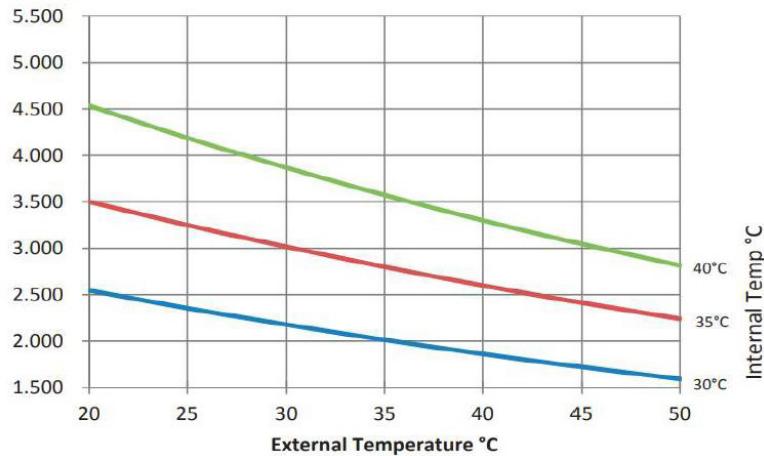

Cooling Capacity vs Temperature

W 60Hz

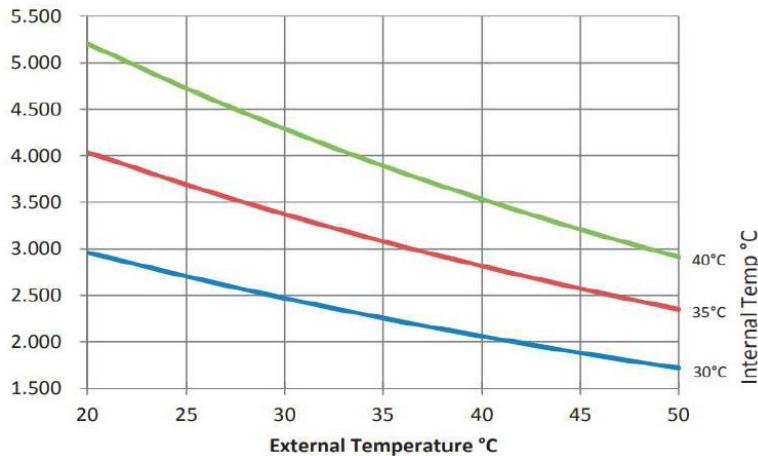


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.